

N64W23760 Main Street Sussex, Wisconsin 53089 Phone (262) 246-5200 FAX (262) 246-5222 Email: <u>info@villagesussex.org</u> Website: <u>www.villagesussex.org</u>

<u>Architectural Review Board Agenda</u> <u>Wednesday, December 2, 2020</u> 4:00 p.m. at Sussex Civic Center – Village Board Room Second Floor

Pursuant to the requirements of Section 19.84, Wis. Stats., notice is hereby given of a meeting of the Village of Sussex Architectural Review Board, at which a quorum of the Village Board may attend in order to gather information about a subject which they have decision making responsibility. The meeting will be held at the above noted date, time and location.

Notice of Village Board Quorum, (Chairperson to announce the following if a quorum of the Village Board is in attendance at the meeting: Please let the minutes reflect that a quorum of the Village Board is present and that the Village Board members may be making comments under the Public Comments section of the agenda, during any Public Hearing(s) or if the rules are suspended to allow them to do so.)

- I. <u>Roll call.</u>
- II. Consideration and possible action on the minutes of July 8, 2020.
- III. <u>Consideration and possible action on a site plan, architecture and lighting plan for Bevco</u> Engineering (W222N5739 Miller Way).
- IV. <u>Consideration and possible action on an amendment to Mammoth Springs at The</u> <u>Corners master sign plan for retail tenant spaces N63W23675 Main Street.</u>

Anthony LeDonne Chairperson

Jeremy Smith Village Administrator

Please note that, upon reasonable notice, efforts will be made to accommodate the needs of disabled individuals through appropriate aids and services. For additional information or to request this service, contact Jeremy Smith at 246-5200.



N64W23760 Main Street Sussex, Wisconsin 53089 Phone (262) 246-5200 FAX (262) 246-5222 Email: info@villagesussex.org Website: www.villagesussex.org

MEMORANDUM

| ТО: | Architectural Review Board | |
|--------------|--|----------------------------|
| FROM: | Kasey Fluet, Assistant Development Director | |
| RE: | ARB meeting for December 2, 2020 | |
| DATE: | November 25, 2020 | |
| The followin | g is background information for the ARB agenda items | Please refer to the Design |

The following is background information for the ARB agenda items. Please refer to the Design Standards dated March 25, 2014.

I. Roll call.

II. Consideration and possible action on the ARB minutes from the July 8, 2020 meeting.

III. Consideration and possible action on the site plan, architectural plan and lighting plan, for Bevco Engineering (W222N5739 Miller Way).

This site is zoned BP-1. The manufacturing, designing and assembling of electrical components is a permitted use in accordance with Section 17.0420 (A)(6)(e)(2) in the BP-1 Business Park District. Bevco Engineering has been operating in the Village since 2001, they design, build and warehouse electrical control panels until shipment. They employ 55 people, hours of operations are Monday through Friday 6:00 a.m. to 5:00 p.m. The site has 75 parking stalls and is sufficient to accommodate the 55 employees.

Due to their growing needs they are adding on 13,900 square feet to their existing 25,300 square foot building. The following are comments for the plans for the addition:

Site

- Adding 13 parking stalls
- Addition meets all required setbacks

Architecture

- Building meets height requirements
- Material to be used meets the Design Standards

Lighting

- Lighting plan meets requirements
- Building wall lights should match or blend with existing wall lights

Policy Question:

1. Are there any concerns with the various plans?

Action Items:

1. Act on the plans.

<u>Staff Recommendation:</u> Staff recommends the ARB approve the site, architectural and lighting plans for the addition to the existing building for Bevco Engineering subject to any conditions.

IV. Consideration and possible action on an amendment to Mammoth Springs at The Corners master sign plan for retail tenant spaces N63W23675 Main Street.

The original master sign plan for this building was approved by the ARB on July 8, 2020. The owner of the building is requesting to modify page 2 of the sign plan regarding wall signs. Instead of a single line of text he will now allow a double line of text. See change:

Wall Signage

1. Theme, Color, Size & Style:

Tenant Wall Sign – Maximum height 24" acrylic letters attached to a common extruded aluminum raceway. Minimum height is 20". Only a single line of text is allowed. The height of our building facade is too short to allow for stacked lines of text. Text per sign is allowed in a single color only. A single color logo or graphic may be allowed within the wall sign allowance. This theme meets a variety of tenants' needs while still providing elegant continuity for the Village's Main Street.

Wall Signage

1. Theme, Color, Size & Style:

Tenant Wall Sign – Maximum height 24" acrylic letters attached to a common extruded aluminum raceway. Minimum height is 20". Two lines of text are allowed. Text per sign is allowed in a single color only. A single color logo or graphic may be allowed within the wall sign allowance. This theme meets a variety of tenants' needs while still providing elegant continuity for the Village's Main Street.

Policy Question:

1. Are there any concerns with the amendment to the Master sign plan?

Action Items:

1. Act on the plan.

<u>Staff Recommendation:</u> Staff recommends the ARB approve the amendment to the master sign plan for Mammoth Springs at The Corners subject to any conditions.



SCALE: 1 = 167'

Village of Sussex

DISCLAIMER:

This map is not a survey of the actual boundary of any property this map depicts.

The Village of Sussex does not guarantee the accuracy of the material contained here in and is not responsible for any misuse or misrepresentation of this information or its derivatives.



Village of Sussex N64 W23760 Main Street Sussex, WI 53089 262-246-5200

Print Date: 11/11/2020

| CONSTRUC | CTION DATA |
|---|---|
| APPLICABLE CODES BUILDING CODE: ZONING CODE: | 2015 IBC WITH WISCONSIN MODIFICATIONS SUSSEX ZONING CODE |
| SITE CRITERIA ZONING DESIGNATION: BUILDING CRITERIA | BP-1 |
| BUILDING OCCUPANCY • OCCUPANCY CLASSIFICATION: • MOST RESTRICTIVE OCCUPANCY: • REQUIRED OCCUPANCY SEPARATION: CONSTRUCTION TYPE: NUMBER OF STORIES: FIRE PROTECTION: MAXIMUM BUILDING HEIGHT (PER IBC): MAXIMUM BUILDING HEIGHT (PER IBC): MAXIMUM ALLOWABLE AREA • SPRINKLER INCREASE: • WEIGHTED AVERAGE OF WIDTHS: = • FRONTAGE INCREASE: | BUSINESS GROUP B, FACTORY GROUP F-1 AND STORAGE GROUP S-2 FACTORY GROUP F-1 NONE (PER SECTION 508.3) 3B I PROVIDED PER NFPA 13 REQUIREMENTS 75 Is = 3 W = [(591 X 30) + (92 X 25)] / 683 29.3 If = $(\frac{F}{P} - 0.25) \frac{W}{30}$ |
| = = • TOTAL: = = | $\begin{array}{rcl} & & X & \\ & & \\ Aa & = & At + [(At)(I_5)] + [(At)(I_7)] \\ & & + & \\ & & S.F. \end{array}$ |
| BUILDING AREA • EXISTING BUILDING: • PROPOSED ADDITION: • TOTAL: CLASSIFICATION OF WORK: | 25,335 S.F. 13,9385.F. 39,273 S.F. ADDITION, ALTERATION-LEVEL 2 |
| ZONING CRITERIA GENERAL LOT INFORMATION • LOT AREA: • AREA DISTURBED BY CONSTRUCTION: • AREA OF NEW IMPERVIOUS SURFACE: BUILDING / PARKING SETBACKS • STREET YARD: • SIDE YARD: • REAR YARD: | 5.6169 ACRES (244,671 S.F.) .45 ACRES (19,500 S.F.) .41 ACRES (18,034 S.F.) 40' / 30' 25' / 5' 25' / 5' |
| MAXIMUM BUILDING HEIGHT: LOT COVERAGE • BUILDING FOOTPRINT | 60' <u>ACTUAL</u> <u>REQUIRED</u> |
| EXISTING BUILDING: PROPOSED ADDITION: TOTAL: • HARD SURFACE AREA | 25,335 S.F. 13,938 S.F. 39,273 S.F. 16.1% 75% MAX. |
| EXISTING PAVING: PROPOSED PAVING: TOTAL: • GREEN SPACE AREA: | 36,924 S.F. <u>4,096 S.F.</u> 41,020 S.F. 16.7% 164,378 S.F. 67.2% 25% MIN. |
| EMPLOYEES 55 EMPLOYEES = 55 PARKING STALL | HE WORK SHIFT WITH THE LARGEST NUMBER OF S REQUIRED |
| • PARKING PROVIDED STANDARD PARKING STALLS: HANDICAPPED STALLS: TOTAL: | 72 STALLS 3 STALLS 75 STALLS |


IMINARY


const


PR

| SITE PLAN LEGEND | | | | | | |
|--|------------------|--|--|--|--|--|
| | PROPERTY LINE | | | | | |
| | SETBACK LINE | | | | | |
| | BURIED GAS MAIN | | | | | |
| —— T —— | BURIED TELEPHONE | | | | | |
| 0 | FOUND IRON PIPE | | | | | |
| | CATCH BASIN | | | | | |
| | TRENCH DRAIN | | | | | |
| -Ó- | HYDRANT | | | | | |
| ⊡O | 20' LIGHT POLE | | | | | |
| ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | EDGE OF TREES | | | | | |
| | ASPHALT PAVING | | | | | |
| 4 | CONCRETE | | | | | |


12'-0" 25'-0" 0 0 40 N 52, N32 LOT 3 C.S.M. NO. 9060 TOTAL AREA: 5.6,169 ACRES

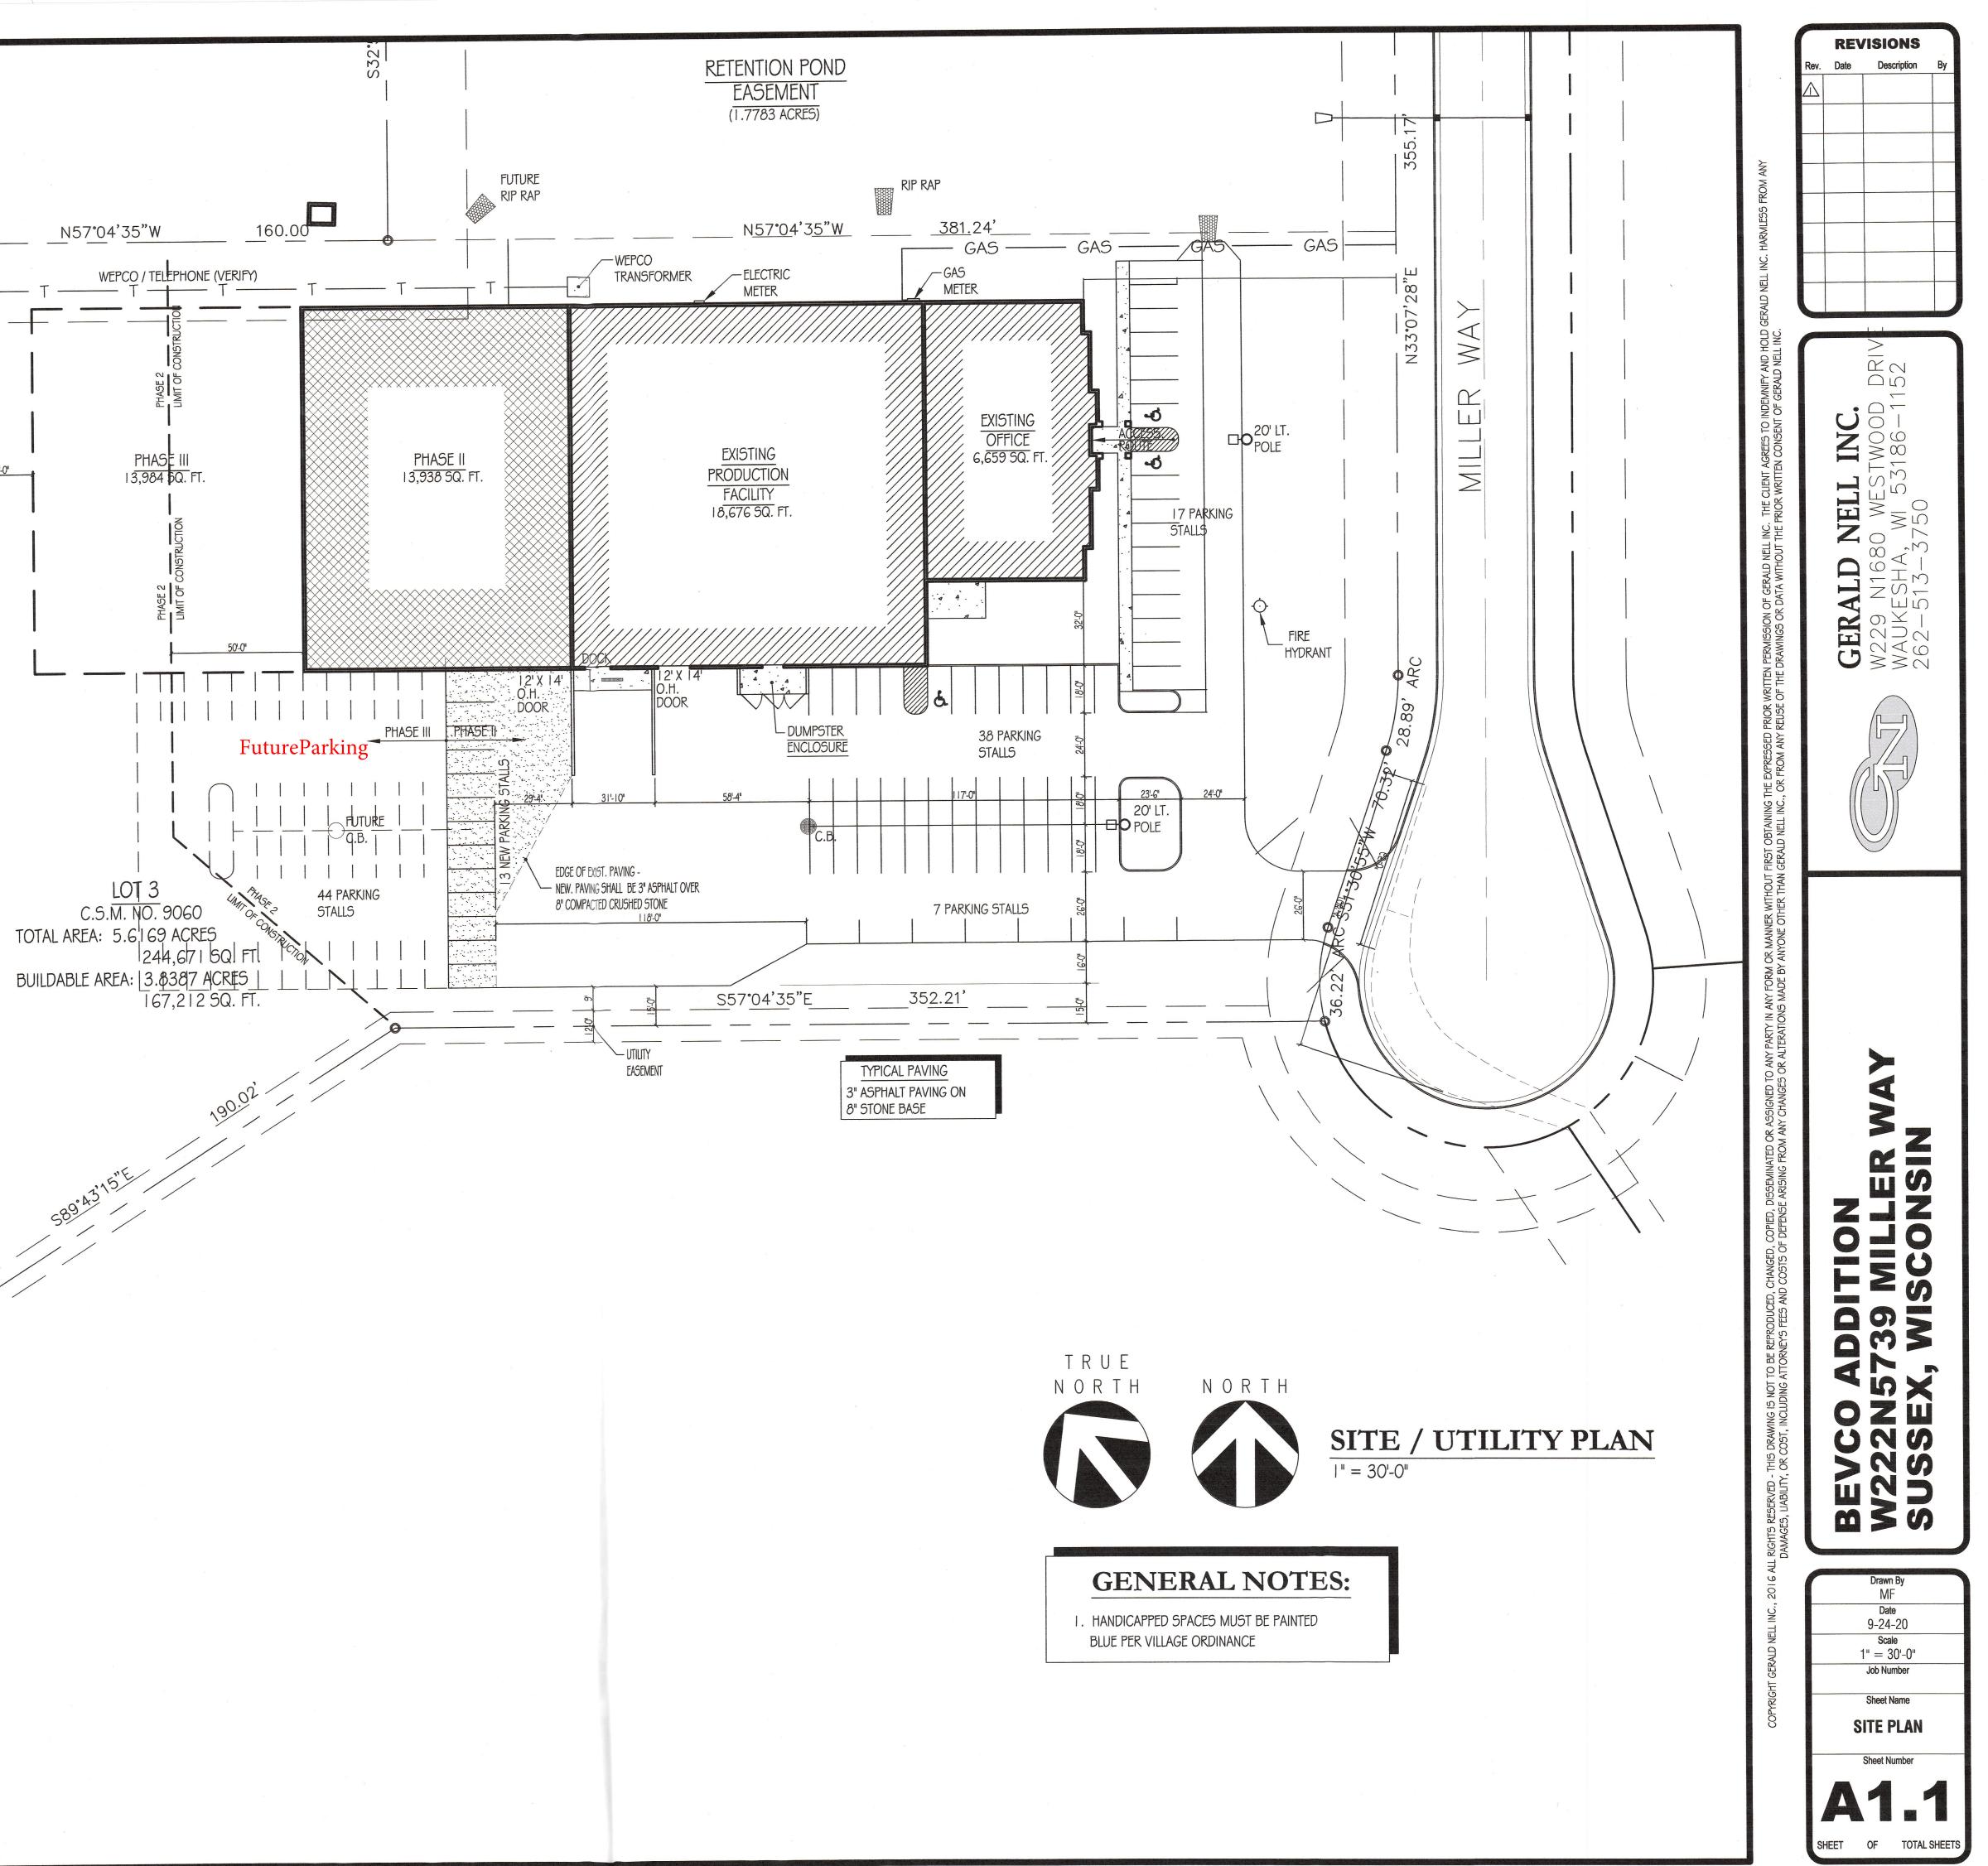

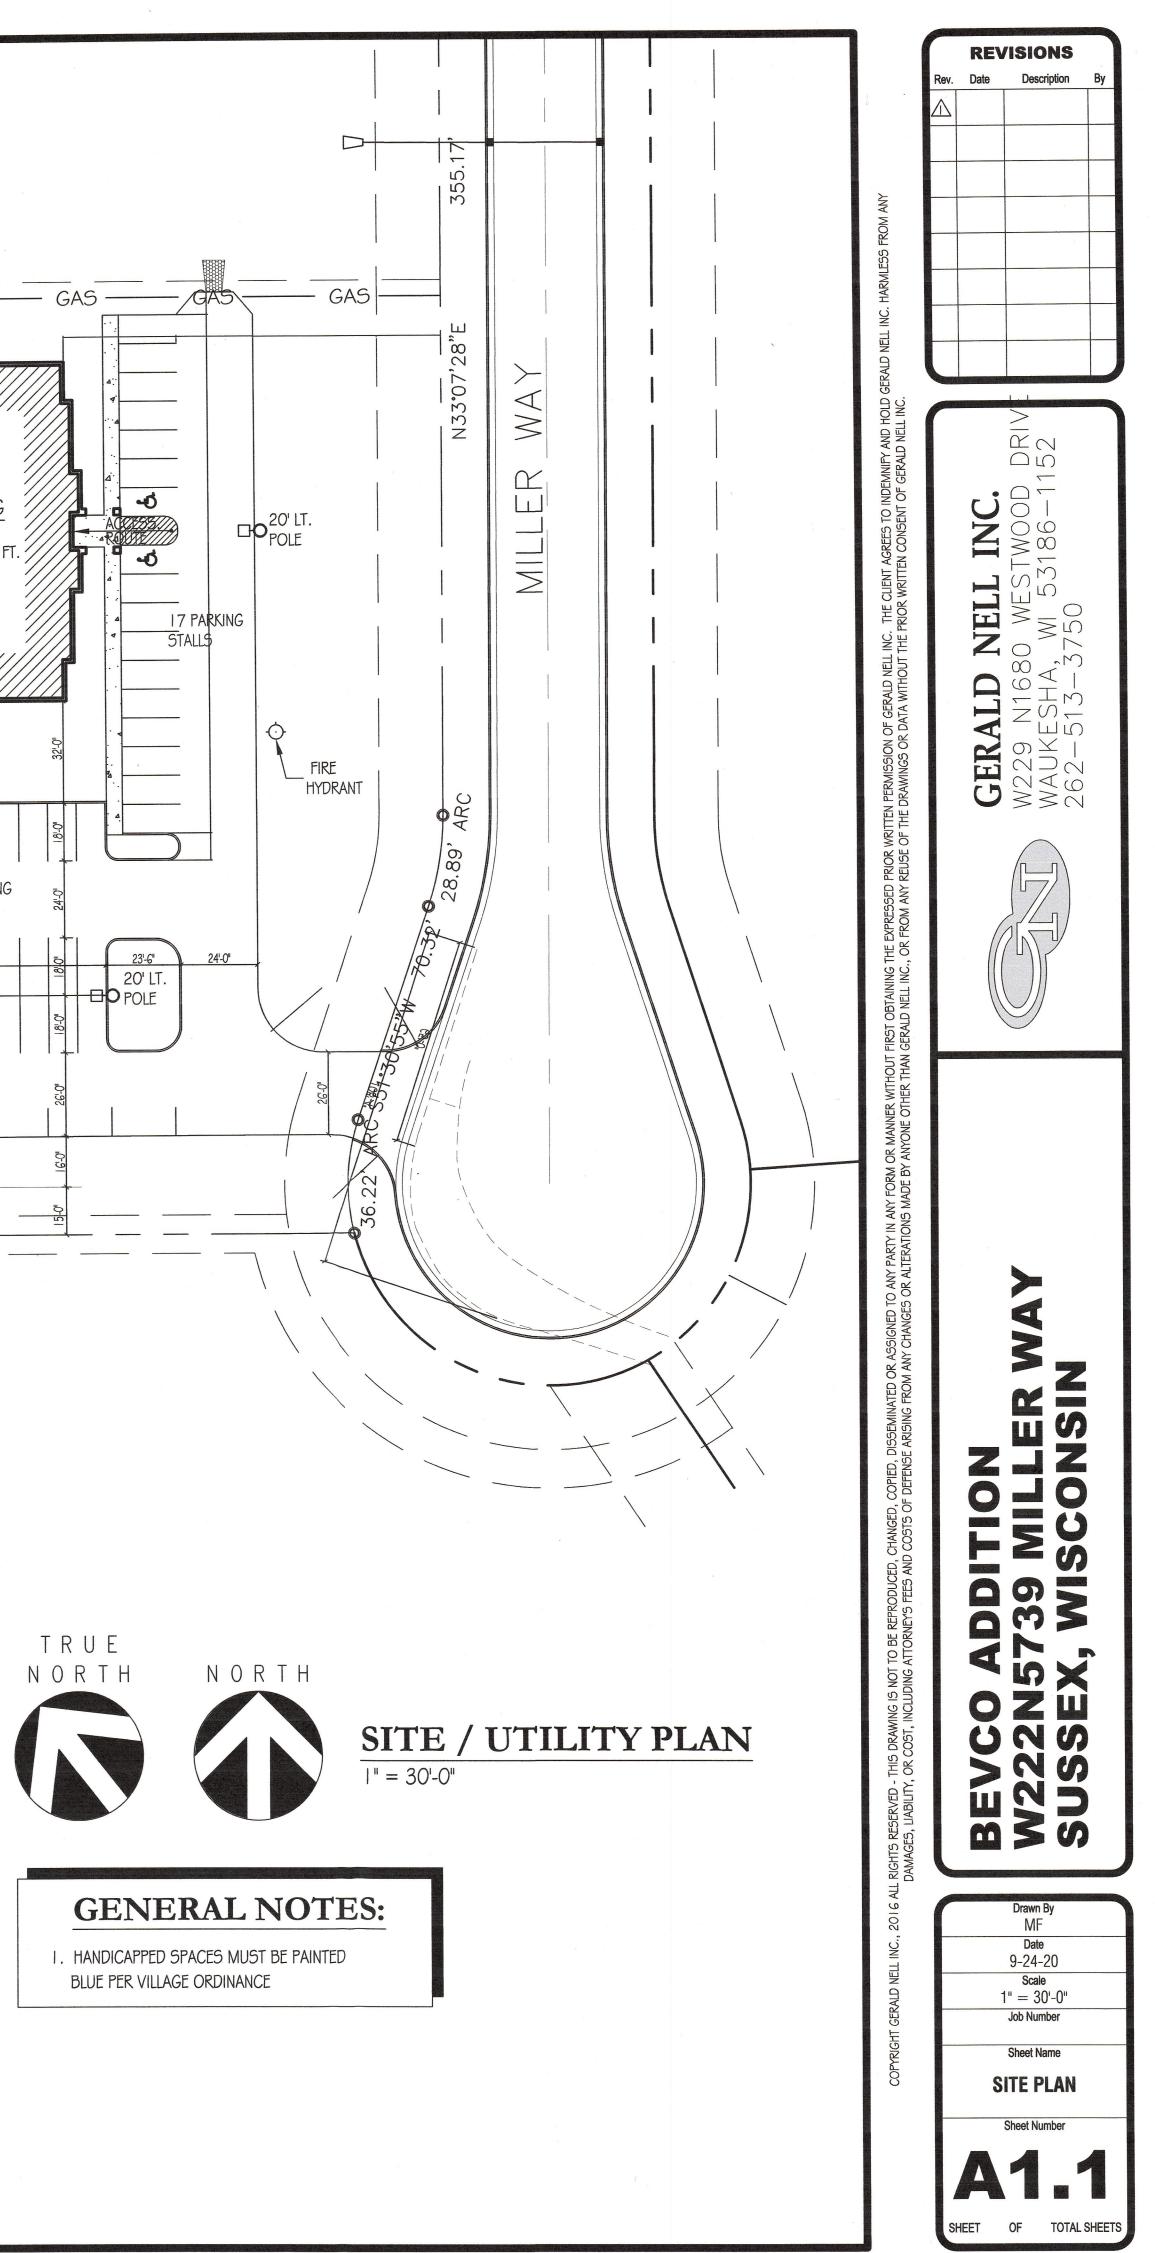

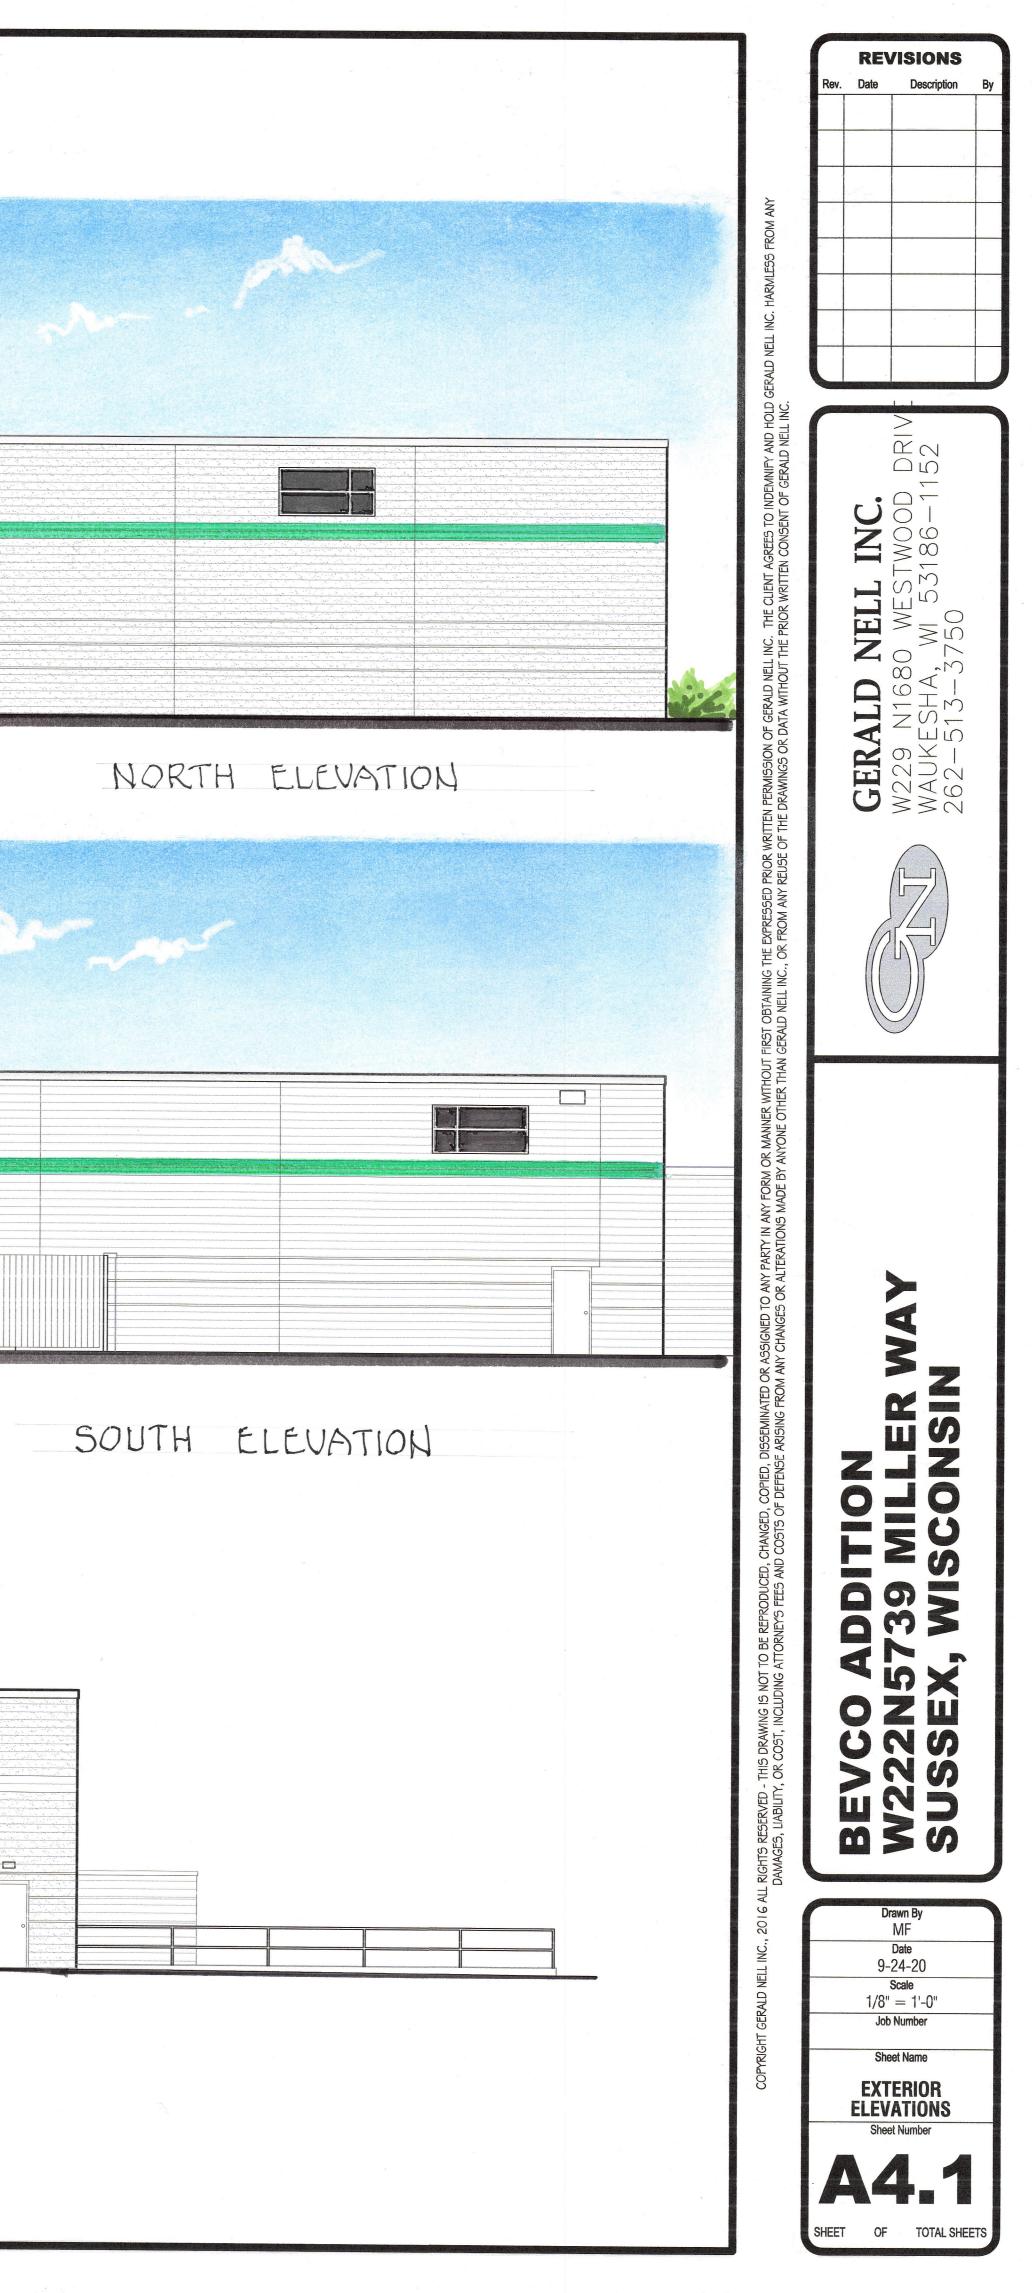

| ⁺ 0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.0 | +0.0 | ⁺ 0.0 | +0.0 | ⁺ 0.0 | ⁺ 0.0 | +0.0 | ⁺ 0.0 | ⁺ 0.0 |
|--|---|---|---|--|--|--|--|--|--|---|--|--|--|--|
| ⁺ 0.0 | ⁺ 0.0 | +0.0 | ⁺ 0.0 | +0.0 | +0.0 | ⁺ 0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.0 | +0.0 | +0.0 | ⁺ 0.0 | +0.0 |
| +0.0 | +0.0 | +0.0 | +0.0 | + <u>0.0</u> | +0.1 | +0.1 | + <mark>0.0</mark> | + <u>0.0</u> | +0.0 | +0.0 | + <u>0.0</u> | +0.0 | +0.0 | +0.0 |
| +0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.1 | +0.3 | +0.4 | | | | | | | |) |
| +0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.1 | +0.7 | ⁺ 2.8 | | | 2:5 WOOD STUD FURKING TO FULL HT. OF OLSU WALL (42:24) WITH R-31 BATTR, VAPOR BARRER, AND SP PLYWOOD. | | | | | |
| ⁺ 0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.1 | ⁺ 0.8 | + 6.2 | | | | | | | | |
| ⁺ 0.0 | ⁺ 0.0 | +0.0 | +0.0 | ⁺ 0.1 | ⁺ 0.8 | OB @ 8 +3.9 | | | | | | | | ELIBOR HOLIA |
| ⁺ 0.0 | +0.0 | ⁺ 0.0 | ⁺ 0.0 | ⁺ 0.1 | ⁺ 0.4 | +0.6 | | | | | | | | V |
| +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.1 | +0.1 | | РТСИ ТР | RUBB GIRDER 6" TO DRAIN | | / | ROOF DRAIN - SET # BELOW PE OF ROOF | RMETER | PITCH TRUES |
| ⁺ 0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | | | ROOF BADDLE | _ / | | | | Ą |
| +0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.0 | +0.0 | +0.0 | | | | | | | | BARDONO SAR |
| +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | | | | | | | | TP/EI |
| +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | | | | | | | ROOF BA | DOLE |
| +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | | РПСН ТК | Was gerder e" to dram — | | | ROOF DRAN - BEE SELOW PER | | PITCH TRUBS |
| +0.0 | +0.0 | +0.0 | + 0.0 | +0.0 | +0.1 | +0.1 | | | | % 1 | %UNEW ADDITI 4 | ON (13,938 S.F | F.) | ۵ |
| | | | | | | | | | | | | | | - enteron Home |
| +0.0 | +0.0 | +0.0 | +0.0 | ⁺ 0.1 | +0.4 | +0.7 | | | 2:4 YOOD STUD FURRING TO FULL HT. OF OMU WALL | | | | | |
| +0.0 | ⁺ 0.0 | +0.0 | ⁺ 0.0 | +0.1 | ⁺ 0.8 | ⁺ 4.1 | | | (*27-0") WITH R-21 BÁTTS, VAPOR BARRIER, AND 50" PLYWOOD. | | | | | |
| | | | | | | | | | | | | | | |
| +0.0 | ⁺ 0.0 | +0.0 | +0.0 | ⁺ 0.1 | ⁺ 0.8 | • 8 @ 80 ⁺ | | | | OA @ | 20' | | | ACCOUNT OF THE OWNER |
| ⁺ 0.0 ⁺ 0.0 | ⁺ 0.0 ⁺ 0.1 | +0.0 +0.2 | +0.0 +0.4 | ⁺ 0.1 ⁺ 0.9 | ⁺ 0.8 ⁺ 2.0 | *08 @ 8 *4.5 | ÷2.8 | ⁺ 4.1 | +6.2 | OA @ | 20' ⁺ 6.9 | +6.3 | ⁺ 7.3 | OA (|
| | | | | | | | +2.8 +3.0 | ⁺ 4.1 ⁺ 3.9 | *6.2 *5.0 | | | +6.3 +6.1 | ⁺ 7.3 ⁺ 6.2 | OA (|
| ⁺ 0.0 | ⁺ 0.1 | +0.2 | +0.4 | ⁺ 0.9 | ⁺ 2.0 | +4.5 | | | | ⁺ 7.7 | ⁺ 6.9 | | | OA (|
| ⁺ 0.0 ⁺ 0.0 | ⁺ 0.1 ⁺ 0.1 | ⁺ 0.2 ⁺ 0.2 | ⁺ 0.4 ⁺ 0.5 | +0.9 +0.9 | ⁺ 2.0 ⁺ 1.6 | ⁺ 4.5 ⁺ 2.5 | ⁺ 3.0 | ⁺ 3.9 | ⁺ 5.0 | ⁺ 7.7 ⁺ 5.9 | ⁺ 6.9 ⁺ 6.2 | +6.1 | ⁺ 6.2 | OA (⁺ 7.5 ⁺ 5.7 |
| +0.0 +0.0 +0.0 | ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 | ⁺ 0.2 ⁺ 0.2 ⁺ 0.2 | ⁺ 0.4 ⁺ 0.5 ⁺ 0.5 | +0.9 +0.9 +0.9 | ⁺ 2.0 ⁺ 1.6 ⁺ 1.3 | +4.5 +2.5 +1.9 | ⁺ 3.0 ⁺ 2.8 | ⁺ 3.9 ⁺ 3.9 | ⁺ 5.0 ⁺ 4.6 | ⁺ 7.7 ⁺ 5.9 ⁺ 5.1 | ⁺ 6.9 ⁺ 6.2 ⁺ 5.8 | +6.1 +6.0 | +6.2 +5.6 | OA (⁺ 7.5 ⁺ 5.7 ⁺ 5.0 |
| +0.0 +0.0 +0.0 +0.0 | +0.1 +0.1 +0.1 +0.1 | +0.2 +0.2 +0.2 +0.3 | +0.4 +0.5 +0.5 +0.5 | +0.9 +0.9 +0.9 +0.9 | +2.0 +1.6 +1.3 +1.0 | +4.5 +2.5 +1.9 +1.5 | +3.0 +2.8 +2.1 | +3.9 +3.9 +2.7 | ⁺ 5.0 ⁺ 4.6 ⁺ 3.0 | ⁺ 7.7 ⁺ 5.9 ⁺ 5.1 ⁺ 3.4 | +6.9 +6.2 +5.8 +3.8 | +6.1 +6.0 +4.1 | +6.2 +5.6 +3.6 | OA (+7.5 +5.7 +5.0 +3.3 |
| +0.0 +0.0 +0.0 +0.0 +0.0 | ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 | +0.2 +0.2 +0.2 +0.3 +0.2 | +0.4 +0.5 +0.5 +0.5 +0.4 | +0.9 +0.9 +0.9 +0.9 +0.7 +0.6 | ⁺ 2.0 ⁺ 1.6 ⁺ 1.3 ⁺ 1.0 ⁺ 0.8 | +4.5 +2.5 +1.9 +1.5 +1.1 | +3.0 +2.8 +2.1 +1.5 | +3.9 +3.9 +2.7 +1.8 | ⁺ 5.0 ⁺ 4.6 ⁺ 3.0 ⁺ 1.9 | +7.7 +5.9 +5.1 +3.4 +2.2 | +6.9 +6.2 +5.8 +3.8 +2.4 | +6.1 +6.0 +4.1 +2.7 | +6.2 +5.6 +3.6 +2.4 | OA (⁺ 7.5 ⁺ 5.7 ⁺ 5.0 ⁺ 3.3 ⁺ 2.1 |
| +0.0 +0.0 +0.0 +0.0 +0.1 +0.1 | ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 | +0.2 +0.2 +0.2 +0.3 +0.2 +0.2 | +0.4 +0.5 +0.5 +0.5 +0.4 +0.3 | +0.9 +0.9 +0.9 +0.7 +0.7 +0.6 +0.4 | +2.0 +1.6 +1.3 +1.0 +0.8 +0.6 | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 | +3.0 +2.8 +2.1 +1.5 +1.1 | +3.9 +3.9 +2.7 +1.8 +1.2 | ⁺ 5.0 ⁺ 4.6 ⁺ 3.0 ⁺ 1.9 ⁺ 1.2 | ⁺ 7.7 ⁺ 5.9 ⁺ 5.1 ⁺ 3.4 ⁺ 2.2 ⁺ 1.4 | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 | +6.1 +6.0 +4.1 +2.7 +1.6 | +6.2 +5.6 +3.6 +2.4 +1.5 | OA (⁺ 7.5 ⁺ 5.7 ⁺ 5.0 ⁺ 3.3 ⁺ 2.1 ⁺ 1.4 |
| +0.0 +0.0 +0.0 +0.0 +0.1 +0.1 +0.0 | *0.1 | +0.2 +0.2 +0.2 +0.3 +0.2 +0.2 +0.2 +0.1 | +0.4 +0.5 +0.5 +0.5 +0.4 +0.3 +0.2 | +0.9 +0.9 +0.9 +0.9 +0.7 +0.6 +0.4 +0.3 | +2.0 +1.6 +1.3 +1.0 +0.8 +0.6 +0.4 | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 | +3.0 +2.8 +2.1 +1.5 +1.1 +0.6 | +3.9 +3.9 +2.7 +1.8 +1.2 +0.7 | +5.0 +4.6 +3.0 +1.9 +1.2 +0.7 | ⁺ 7.7 ⁺ 5.9 ⁺ 5.1 ⁺ 3.4 ⁺ 2.2 ⁺ 1.4 ⁺ 0.8 | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 | +6.1 +6.0 +4.1 +2.7 +1.6 +0.8 | +6.2 +5.6 +3.6 +2.4 +1.5 +0.8 | OA (+7.5 +5.7 +5.0 +3.3 +2.1 +1.4 +0.8 |
| +0.0 +0.0 +0.0 +0.0 +0.1 +0.1 +0.1 +0.0 +0.0 | +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 | +0.2 +0.2 +0.2 +0.3 +0.2 +0.2 +0.2 +0.1 +0.1 | ⁺ 0.4 ⁺ 0.5 ⁺ 0.5 ⁺ 0.5 ⁺ 0.4 ⁺ 0.3 ⁺ 0.2 ⁺ 0.1 | ⁺ 0.9 ⁺ 0.9 ⁺ 0.9 ⁺ 0.7 ⁺ 0.6 ⁺ 0.4 ⁺ 0.3 ⁺ 0.2 | ⁺ 2.0 ⁺ 1.6 ⁺ 1.3 ⁺ 1.0 ⁺ 0.8 ⁺ 0.6 ⁺ 0.4 ⁺ 0.2 | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.3 | +3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 | +3.9 +3.9 +2.7 +1.8 +1.2 +0.7 +0.3 | ⁺ 5.0 ⁺ 4.6 ⁺ 3.0 ⁺ 1.9 ⁺ 1.2 ⁺ 0.7 ⁺ 0.3 | ⁺ 7.7 ⁺ 5.9 ⁺ 5.1 ⁺ 3.4 ⁺ 2.2 ⁺ 1.4 ⁺ 0.8 ⁺ 0.4 | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 | +6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 | +6.2 +5.6 +3.6 +2.4 +1.5 +0.8 +0.3 | OA (⁺ 7.5 ⁺ 5.7 ⁺ 5.0 ⁺ 3.3 ⁺ 2.1 ⁺ 1.4 ⁺ 0.8 ⁺ 0.4 |
| to.0 to.0 to.0 to.0 to.0 to.0 to.1 to.1 to.1 to.0 to.0 to.0 to.0 to.0 | t0.1 | +0.2 +0.2 +0.2 +0.3 +0.2 +0.2 +0.2 +0.1 +0.1 +0.1 | +0.4 +0.5 +0.5 +0.5 +0.4 +0.3 +0.2 +0.1 +0.1 | +0.9 +0.9 +0.9 +0.7 +0.6 +0.4 +0.3 +0.2 +0.1 | *2.0 *1.6 *1.3 *1.0 *0.8 *0.6 *0.4 *0.2 *0.1 | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.3 +0.1 | +3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 +0.1 | +3.9 +3.9 +2.7 +1.8 +1.2 +0.7 +0.3 +0.1 | ⁺ 5.0 ⁺ 4.6 ⁺ 3.0 ⁺ 1.9 ⁺ 1.2 ⁺ 0.7 ⁺ 0.3 ⁺ 0.1 | +7.7 +5.9 +5.1 +3.4 +2.2 +1.4 +0.8 +0.4 +0.1 | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.1 | +6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.1 | +6.2 +5.6 +3.6 +2.4 +1.5 +0.8 +0.3 +0.1 | OA (+7.5 +5.7 +5.0 +3.3 +2.1 +1.4 +0.8 +0.4 +0.4 +0.1 |
| +0.0 +0.0 +0.0 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0 +0.0 +0.0 +0.0 | +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0 | +0.2 +0.2 +0.2 +0.3 +0.2 +0.2 +0.2 +0.1 +0.1 +0.1 +0.1 +0.0 | +0.4 +0.5 +0.5 +0.5 +0.4 +0.3 +0.2 +0.1 +0.1 +0.0 | *0.9 *0.9 *0.9 *0.7 *0.6 *0.4 *0.3 *0.2 *0.1 *0.0 | ⁺ 2.0 ⁺ 1.6 ⁺ 1.3 ⁺ 1.0 ⁺ 0.8 ⁺ 0.6 ⁺ 0.4 ⁺ 0.2 ⁺ 0.1 ⁺ 0.1 | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.5 +0.3 +0.1 +0.1 | +3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 +0.1 +0.1 | +3.9 +3.9 +2.7 +1.8 +1.2 +0.7 +0.3 +0.1 +0.1 | *5.0 *4.6 *3.0 *1.9 *1.2 *0.7 *0.3 *0.1 *0.1 | *7.7 *5.9 *5.1 *3.4 *2.2 *1.4 *0.8 *0.4 *0.4 *0.1 *0.1 | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.1 +0.0 | +6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.1 +0.0 | *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 | OA (⁺ 7.5 ⁺ 5.7 ⁺ 5.0 ⁺ 3.3 ⁺ 2.1 ⁺ 1.4 ⁺ 0.8 ⁺ 0.4 ⁺ 0.1 ⁺ 0.1 |
| to.0 to.0 to.0 to.0 to.0 to.0 to.1 to.1 to.1 to.0 | t0.1 t0.1<th> ⁺0.2 ⁺0.2 ⁺0.2 ⁺0.3 ⁺0.2 ⁺0.2 ⁺0.2 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 </th><th> ⁺0.4 ⁺0.5 ⁺0.5 ⁺0.5 ⁺0.4 ⁺0.3 ⁺0.2 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 </th><th> +0.9 +0.9 +0.9 +0.7 +0.6 +0.4 +0.3 +0.2 +0.1 +0.0 +0.0 +0.0 </th><th> *2.0 *1.6 *1.3 *1.0 *0.8 *0.6 *0.4 *0.2 *0.1 *0.1 *0.0 </th><th>+4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.3 +0.5 +0.3 +0.1 +0.1 +0.1</th><th>+3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 +0.1 +0.1 +0.1 +0.0</th><th>+3.9 +3.9 +2.7 +1.8 +1.2 +0.7 +0.7 +0.3 +0.1 +0.1 +0.1</th><th> *5.0 *4.6 *3.0 *1.9 *1.2 *0.7 *0.3 *0.1 *0.1 *0.1 *0.1 *0.1 </th><th> +7.7 +5.9 +5.1 +3.4 +2.2 +1.4 +0.8 +0.4 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 </th><th>+6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.1 +0.0 +0.0</th><th>+6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.1 +0.0 +0.0</th><th> *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 *0.0 </th><th>OA (+7.5 +5.7 +5.0 +3.3 +2.1 +1.4 +0.8 +0.4 +0.4 +0.1 +0.1 +0.1 +0.1 +0.1</th> | ⁺0.2 ⁺0.2 ⁺0.2 ⁺0.3 ⁺0.2 ⁺0.2 ⁺0.2 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 | ⁺0.4 ⁺0.5 ⁺0.5 ⁺0.5 ⁺0.4 ⁺0.3 ⁺0.2 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 | +0.9 +0.9 +0.9 +0.7 +0.6 +0.4 +0.3 +0.2 +0.1 +0.0 +0.0 +0.0 | *2.0 *1.6 *1.3 *1.0 *0.8 *0.6 *0.4 *0.2 *0.1 *0.1 *0.0 | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.3 +0.5 +0.3 +0.1 +0.1 +0.1 | +3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 +0.1 +0.1 +0.1 +0.0 | +3.9 +3.9 +2.7 +1.8 +1.2 +0.7 +0.7 +0.3 +0.1 +0.1 +0.1 | *5.0 *4.6 *3.0 *1.9 *1.2 *0.7 *0.3 *0.1 *0.1 *0.1 *0.1 *0.1 | +7.7 +5.9 +5.1 +3.4 +2.2 +1.4 +0.8 +0.4 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.1 +0.0 +0.0 | +6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.1 +0.0 +0.0 | *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 *0.0 | OA (+7.5 +5.7 +5.0 +3.3 +2.1 +1.4 +0.8 +0.4 +0.4 +0.1 +0.1 +0.1 +0.1 +0.1 |
| +0.0 +0.0 +0.0 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0 +0.0 +0.0 +0.0 +0.0 +0.0 +0.0 | +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0 +0.0 +0.0 +0.0 | +0.2 +0.2 +0.2 +0.3 +0.2 +0.2 +0.1 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0 +0.0 | *0.4 *0.5 *0.5 *0.5 *0.4 *0.3 *0.2 *0.1 *0.1 *0.1 *0.0 *0.0 *0.0 | *0.9 *0.9 *0.9 *0.7 *0.6 *0.4 *0.3 *0.2 *0.1 *0.0 *0.0 *0.0 | <pre>*2.0 *1.6 *1.3 *1.0 *0.8 *0.6 *0.4 *0.2 *0.1 *0.1 *0.1 *0.0 *0.0</pre> | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.3 +0.1 +0.1 +0.1 +0.0 +0.0 | +3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 +0.1 +0.1 +0.1 +0.0 +0.0 | *3.9 *3.9 *2.7 *1.8 *1.2 *0.7 *0.3 *0.1 *0.1 *0.1 *0.0 *0.0 | *5.0 *4.6 *3.0 *1.9 *1.2 *0.7 *0.3 *0.1 *0.1 *0.1 *0.0 *0.0 | *7.7 *5.9 *5.1 *3.4 *2.2 *1.4 *0.8 *0.4 *0.4 *0.1 *0.1<th>+6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.3 +0.1 +0.0 +0.0 +0.0</th><th>+6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.3 +0.1 +0.0 +0.0 +0.0</th><th> *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 *0.0 *0.0 *0.0 </th><th>OA (⁺7.5 ⁺5.7 ⁺5.0 ⁺3.3 ⁺2.1 ⁺1.4 ⁺0.8 ⁺0.4 ⁺0.4 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0</th> | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.3 +0.1 +0.0 +0.0 +0.0 | +6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.3 +0.1 +0.0 +0.0 +0.0 | *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 *0.0 *0.0 *0.0 | OA (⁺ 7.5 ⁺ 5.7 ⁺ 5.0 ⁺ 3.3 ⁺ 2.1 ⁺ 1.4 ⁺ 0.8 ⁺ 0.4 ⁺ 0.4 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.0 ⁺ 0.0 |
| to.0 to.0 to.0 to.0 to.0 to.1 to.1 to.0 | t0.1 t0.1<td> ⁺0.2 ⁺0.2 ⁺0.2 ⁺0.3 ⁺0.2 ⁺0.2 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 ⁺0.0 ⁺0.0 ⁺0.0 </td><td> *0.4 *0.5 *0.5 *0.5 *0.4 *0.3 *0.2 *0.1 *0.1 *0.1 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0 *0.0 </td><td> *0.9 *0.9 *0.9 *0.7 *0.6 *0.4 *0.3 *0.2 *0.1 *0.2 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0 *0.0 </td><td><pre>*2.0 *1.6 *1.3 *1.0 *0.8 *0.6 *0.4 *0.2 *0.1 *0.1 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0</pre></td><td>+4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.3 +0.5 +0.3 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0</td><td>+3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0</td><td> +3.9 +3.9 +2.7 +1.8 +1.2 +0.7 +0.7 +0.3 +0.1 +0.1 +0.0 +0.0 +0.0 +0.0 </td><td> *5.0 *4.6 *3.0 *1.9 *1.2 *0.7 *0.3 *0.1 *0.1 *0.1 *0.0 *0.0 *0.0 *0.0 </td><td> *7.7 *5.9 *5.1 *3.4 *2.2 *1.4 *0.8 *0.4 *0.4 *0.1 *0.1<td>+6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.1 +0.0 +0.0 +0.0 +0.0 +0.0</td><td>+6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.1 +0.0 +0.0 +0.0 +0.0</td><td> *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0 *0.0 </td><td>OA (⁺7.5 ⁺5.7 ⁺5.0 ⁺3.3 ⁺2.1 ⁺1.4 ⁺0.8 ⁺0.4 ⁺0.4 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 ⁺0.0</td></td> | ⁺0.2 ⁺0.2 ⁺0.2 ⁺0.3 ⁺0.2 ⁺0.2 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 ⁺0.0 ⁺0.0 ⁺0.0 | *0.4 *0.5 *0.5 *0.5 *0.4 *0.3 *0.2 *0.1 *0.1 *0.1 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0 *0.0 | *0.9 *0.9 *0.9 *0.7 *0.6 *0.4 *0.3 *0.2 *0.1 *0.2 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0 *0.0 | <pre>*2.0 *1.6 *1.3 *1.0 *0.8 *0.6 *0.4 *0.2 *0.1 *0.1 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0</pre> | +4.5 +2.5 +1.9 +1.5 +1.1 +0.8 +0.5 +0.3 +0.5 +0.3 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0 | +3.0 +2.8 +2.1 +1.5 +1.1 +0.6 +0.3 +0.1 +0.1 +0.1 +0.0 +0.0 +0.0 | +3.9 +3.9 +2.7 +1.8 +1.2 +0.7 +0.7 +0.3 +0.1 +0.1 +0.0 +0.0 +0.0 +0.0 | *5.0 *4.6 *3.0 *1.9 *1.2 *0.7 *0.3 *0.1 *0.1 *0.1 *0.0 *0.0 *0.0 *0.0 | *7.7 *5.9 *5.1 *3.4 *2.2 *1.4 *0.8 *0.4 *0.4 *0.1 *0.1<td>+6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.1 +0.0 +0.0 +0.0 +0.0 +0.0</td><td>+6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.1 +0.0 +0.0 +0.0 +0.0</td><td> *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0 *0.0 </td><td>OA (⁺7.5 ⁺5.7 ⁺5.0 ⁺3.3 ⁺2.1 ⁺1.4 ⁺0.8 ⁺0.4 ⁺0.4 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.1 ⁺0.0 ⁺0.0 ⁺0.0</td> | +6.9 +6.2 +5.8 +3.8 +2.4 +1.5 +0.8 +0.3 +0.1 +0.0 +0.0 +0.0 +0.0 +0.0 | +6.1 +6.0 +4.1 +2.7 +1.6 +0.8 +0.3 +0.1 +0.0 +0.0 +0.0 +0.0 | *6.2 *5.6 *3.6 *2.4 *1.5 *0.8 *0.3 *0.1 *0.0 *0.0 *0.0 *0.0 *0.0 *0.0 | OA (⁺ 7.5 ⁺ 5.7 ⁺ 5.0 ⁺ 3.3 ⁺ 2.1 ⁺ 1.4 ⁺ 0.8 ⁺ 0.4 ⁺ 0.4 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.1 ⁺ 0.0 ⁺ 0.0 ⁺ 0.0 |

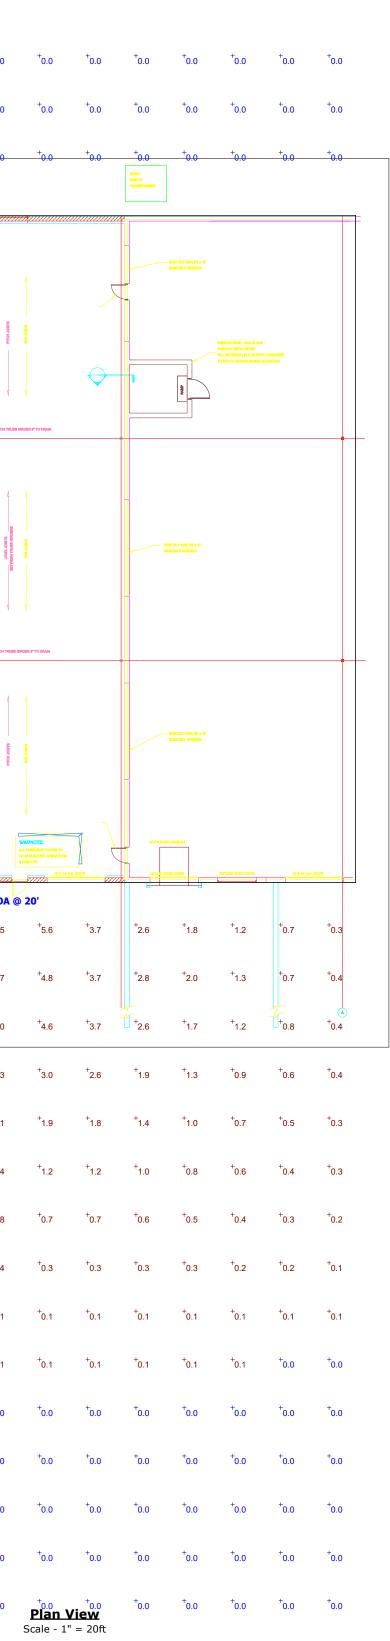

| Schedule | | | | | | | | | | | | | | | | | |
|----------|-------|-------|-----|----------------------|---|---|------|-----------------|---|-----------------------|---|-----|---------|------------|--|--------------|-------|
| Symbol | Label | Image | QTY | Manufacturer | Catalog Number | Description | Lamp | Number Lamps | Filename | Lumens per Lamp | | LLF | Wattage | Efficiency | Distribut ion | Polar Plot | Notes |
| | ΟΑ | | 2 | Lithonia Lighting | KAD LED 60C 1000 40K R4 MVOLTWBD04 DDBTXD | KAD LED, 60 LED, 1 AMP MVOLT DRIVER, 4000K, TYPE 4 OPTICS. | | 1 | KAD_LED_60C_ 1000_40K_R4_ MVOLT.ies | 20693 | 1 | 1 | 216 | 100% | TYPE IV, MEDIUM, BUG RATING: B3 - U0 - G4 | Max: 13410cd | |
| | ОВ | | 2 | Lithonia Lighting | WPX1 LED P2 40K MVOLT DDBXD | WPX1 LED wallpack 3000lm 4000K color temperature 120- 277 Volts | | 1 | WPX1_LED_P2_ 40K_Mvolt.ies | 2913 | 1 | 1 | 24.42 | 100% | TYPE III, SHORT, BUG RATING: B1 - U0 - G1 | Max: 1302cd | |

Note

- 1. READINGS AT GROUND LEVEL
- 2. MEASUREMENRTS TEN FOOT ON CENTER

REVERE SELECTRIC Meserver SUPPLY CO.



BEVCO NEW ADDITION SITE LIGHTING PLAN

Designer

Date 10/23/2020 Scale Not to Scale Drawing No.

Village of Sussex - Master Sign Program

Project Name: Mammoth Springs at The Corners

Property Address: Main Street & Silver Spring Drive, Sussex, WI 53089

Current Zoning: B-4 Central Mixed-Use Business

Applicant Name: Sawall Development

Contact: Arthur Sawall – <u>arthur@sawalldevelopment.com</u> Joel Martin – <u>jmartin@sawalldevelopment.com</u>

Applicant Address: N63 W23217 Main St #200

City: Sussex State: WI Zip: 53089

Intent

This document comprises the Master Sign Program (MSP) for Mammoth Springs at The Corners (previously known as Mammoth Lofts) located on the corner of Main Street and Silver Spring Drive in the Village of Sussex. Mammoth Springs at The Corners is a mixed-use business development consisting of retail space and luxury multifamily housing. The intent of the MSP is to set forth a theme as to placement, lettering style, color, materials, mounting method and other related design considerations of signs, while at the same time reducing sign clutter.

Approval Procedure

All planned sign programs shall be reviewed and approved by the Architectural Control Board. After the approval of this sign program, no sign shall be erected, placed or maintained except in conformance with the planned sign program. Amendments to this document require Architectural Control Board review and approval in the form of a Master Sign Program Amendment.

Separate Sign Permits are required for each individual sign throughout the development and will be issued by the Village of Sussex Department of Building Inspection. Prior to application, the tenant shall obtain initial approval from the Owner of Mammoth Springs at The Corners and the application must bear the signature and/or stamp of the appropriate Owner representative(s).

Professionally Prepared

All signs and sign plans shall be "professionally" prepared and demonstrate dimensions, letter style and type, materials, color selection, and craftsmanship. Applications to the Village of Sussex Department of Building Inspection for sign permits shall include professionally rendered imagery and dimension scale drawings and shall depict the type of light source, all materials, and colors.

Mammoth Springs at The Corners Master Sign Plan

Interior Signage

Permanent window signs will be allowed and may-not-exceed twenty five percent (25%) of the gross window area in which they are installed.

All national accounts such as Subway, Quiznos, etc. would be allowed to use their corporate colors for their signage. All signs must be approved by the Landlord as well as the Village of Sussex prior to permit being issued by the Village of Sussex.

Wall Signage

1. Theme, Color, Size & Style:

Tenant Wall Sign – Maximum height 24" acrylic letters attached to a common extruded aluminum raceway. Minimum height is 20". Two lines of text are allowed. Text per sign is allowed in a single color only. A single color logo or graphic may be allowed within the wall sign allowance. This theme meets a variety of tenants' needs while still providing elegant continuity for the Village's Main Street.

Signs will be illuminated from within also known as "face-illuminated" as opposed to external lighting such as a gooseneck lamp shining onto the sign to illuminate it. Some renderings may appear to have a backer panel to which signs are commonly mounted to, however in the renderings for this development, this space is simply illustrating the area and square footage to which the signs are constrained to.

Letter style may match corporate identification for all tenants (block, script, serif, etc.). Corporate logos may be used in conjunction with letters when such logos are part of a corporate identity. The maximum vertical logo height shall be limited to the maximum letter height allowed. All signs will have steady illumination. No flashing or blinking lights will be permitted.

2. Proposed Location:


Tenant Wall – Wall signs shall use the designated sign band. Tenants with multiple entrances will only be allowed one wall sign per side of the building. Upon approval of landlord and as allowed by the Village of Sussex Sign Code Section 17.0807 J, end cap tenants may be allowed an additional wall sign to maximize visibility to customers. Sign text and logos shall be placed within the applicable allowable sign zone consistent with the following guidelines.

- With each wall sign placed within a designated sign band, the vertical orientation of the wall sign must be within the allowable sign zone and be evenly balanced relative to a horizontal line running through the horizontal center of the allowable sign zone.
- 2. Each wall sign shall be placed and sized in a manner such that it does not interfere with any architectural elements of the building.
- 3. Proposed Size:

Tenant Wall – The maximum square footage allowed for exterior wall signs will be determined based on the size of the sign band and the quantity of tenant wall signs in that space. Current sizes are uniform to ensure a clean and professional design.


The following chart shows the square footage allowed for single wall signs in the designated sign band.

| Sign Band | Max Height | Max Length | Max SF |
|--|------------|------------|--------|
| 9 Center Bands on both North & South Sides | 24" | 144" | 24 |
| 2 End Bands on both North & South Sides (Corner Units) | 24" | 300″ | 50 |
| Both East & West Band (Corner Units' Additional) | 24" | 300″ | 50 |

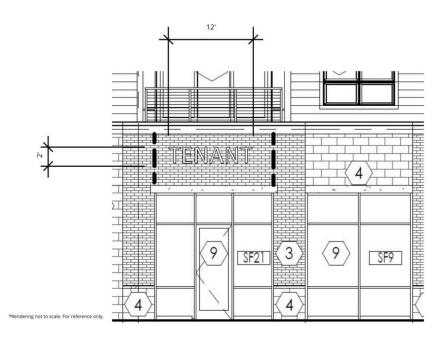


Building Layout

Both North and South sides of the building have 9 possible sign locations at maximum dimensions 2' in height and 12' in length. Additionally, the corner units on both the North and South sides have the longer sign locations at maximum dimensions 2' in height and 25' in length.

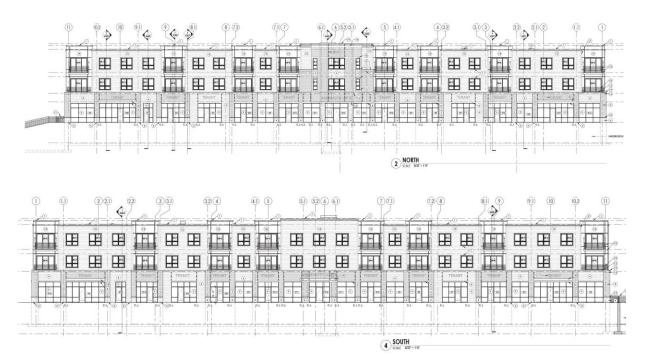


The East and West sides of the building each have one more location for the longer sign maximum dimensions of 2' in height and 25' in length. Signage may not exceed 25' in length on the East and West sides because the center third of the building's design is a bump out.

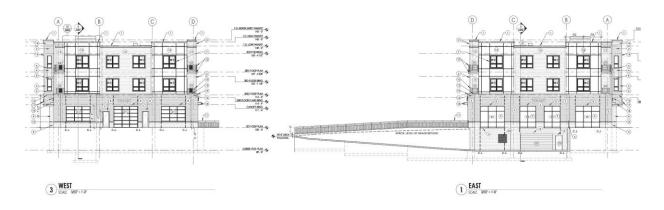


Face-Illuminated Sign Design

Below is a drawing prepared by South Water Signs for Mammoth Springs at The Corners' retail vendor Athletico in accordance with the Master Sign Plan illustrating the face-illuminated raceway mounted sign. All rights reserved. Each retail sign at Mammoth Springs at The Corners must be installed with the design concept of face-illuminated raceway mounted signs.

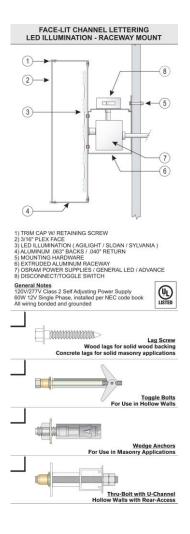

All signage must be approved by the Landlord as well as the Village of Sussex prior to permit being issued by the Village of Sussex.

For questions and clarifications, please contact Sawall Development at (262) 297-4444. N63 W23217 Main St #200, Sussex, WI 53089.

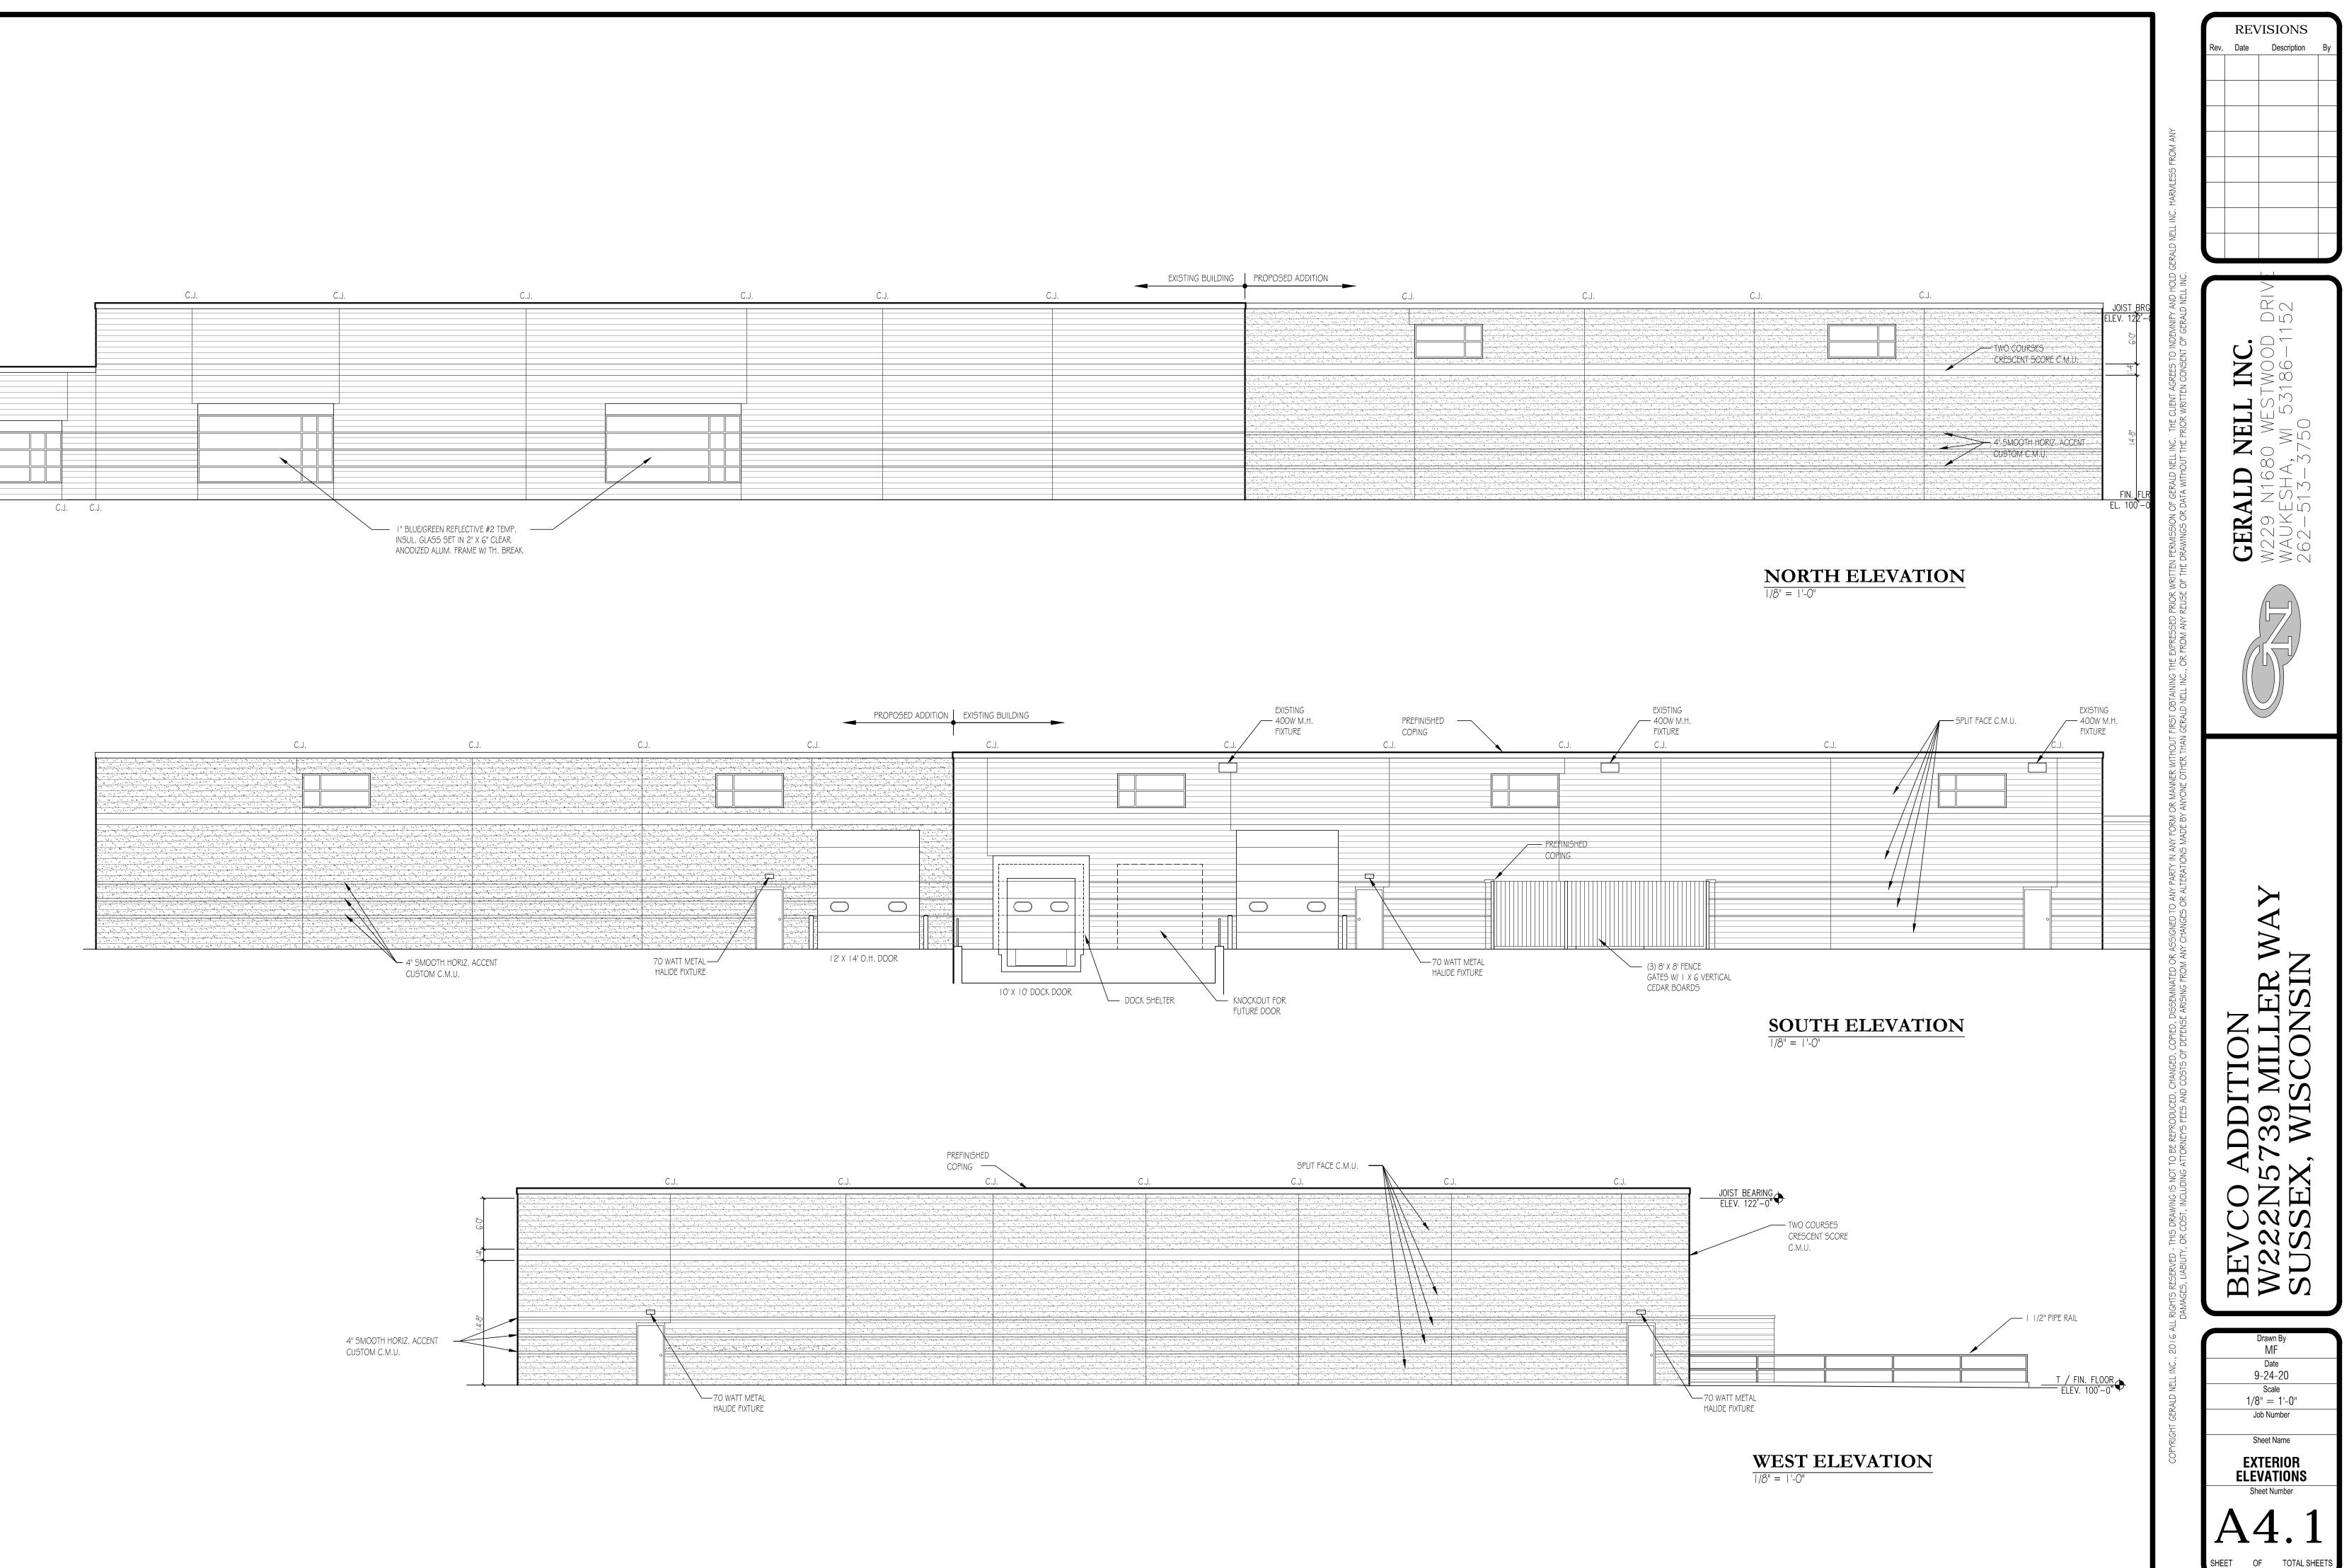

| C. | J. C.J. | C.J. | C.J. |
|----|---------|---|--|
| | l. | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | Berne a se en la construction de la service de la construction de | and the second of the second |

| | PREFINISHED COPING | | SPLIT FACE C.M.L | J | | |
|------|--|--|--|---------------------------------------|---|------|
| C.J. | C.J. | C.J. | C.J. | | C.J. | C.J. |
| | | | in an | | | |
| | | | | | | |
| | | | | · · · · · · · · · · · · · · · · · · · | | |
| | こうちゅう しょうしょう ちょうしゃ 住在 しきしゃく たちから かんかん しゅうざい | | | | 2. Maximum constraints and second se second second sec | |
| | 1919년 - 전문 문문 영국 전문 이번 전문 문문 문문 전문 인터 이번 - 1929년 - 1919년 - 1919년 1929년 - 1919년 - | | and a second | | | |
| | | | | | I = I | |
| | | | | | | |
| | · · · · · · · · · · · · · · · · · · · | 가지 않는 것 같아요. 정말 가지 않는 것 같아요. 가지 않는 것이 가지 않는 것을 수 없다. | and we should be a start of the dealers of the start. | | | |
| | | | | | | |
| | | | | | and the second state of the second states of the second states of the second states of the second states of the | |
| | | | | | | |
| | | | | | | |